Featuring the
Intel® G41 Express Chipset

MAINBOARD
G41M-P33 Combo

- Intel LGA 775 Platform
- Support DDR2/3 Memory
- Micro-ATX (224x198mm)
- Support Winki II

Key Features

Solid Cap on PWM

Featuring solid capacitors, MSI motherboard generates less heat and ensures longer lifespan, operating under extreme conditions.

Winki 2

It integrates all frequently used internet functions making surfing the internet more easily
Free Pre-OS application

M-Flash

M-Flash let your BIOS data be saved in USB drive. It not only have backup and upgrade function, moreover it can be seen a portable BIOS chip which is actually able to boot your PC up.

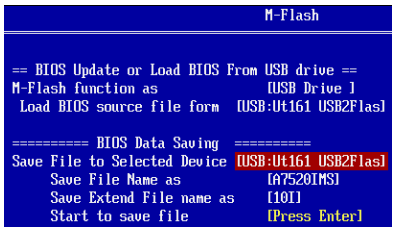
M-Flash
== BIOS Update or Load BIOS From USB drive ==
M-Flash function as [USB Drive]
Load BIOS source file form [USB:Ut161 USB2Flas]
========== BIOS Data Saving ==========
Save File to Selected Device [USB:Ut161 USB2Flas]
Save File Name as [A7520IMS]
Save Extend File name as [10I]
Start to save file [Press Enter]

Specifications

Processor	Intel® Core™ 2 Quad/ Duo/ Pentium / Pentium™ Dual-Core, Celeron® Processors with LGA 775 socket
Chipset	G41+ICH7
Memory	2 DIMMs support DDR2 667/800/1066(OC)MHz up to 8GB Max 2 DIMMs support DDR3 800/1066/1333(OC)MHz up to 8GB Max
Video	1 PCI Express x16 slot
Audio	6 Channels HD Audio subsystem
LAN	10/ 100 Mbits /sec LAN subsystem
Peripheral interfaces	4 SATA 3.0 Gbps ports from Intel® ICH 7 1 PATA IDE port with ATA-66/100 support 8 USB 2.0 ports (4 external / 4 internal)
Expansion capabilities	1 PCI-E x1 slot 1 PCI slot